


PRIVOD TN - S

3/N/PE 400V/50Hz

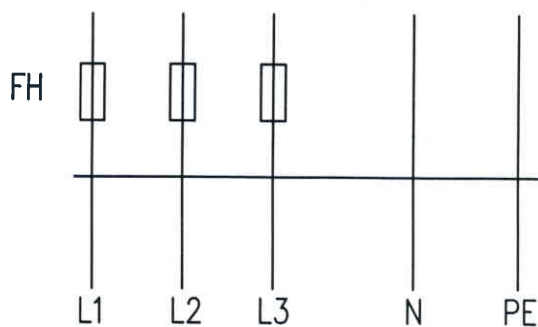


Privodni kabel dle výkonu motoru

ukonceny uzamykatelnym hl. vypinacem
naprikl. kabel CYKY 5Jx2,5mm (4mm, 6mm)

- do 3kW - 5x2,5mm
- 4kW a 5,5kW - 5x4mm

s ohledem na:

- delku privodu
- zpusob ulozeni
- teplotu okoli
- pocet kabelu ve svazku atd.

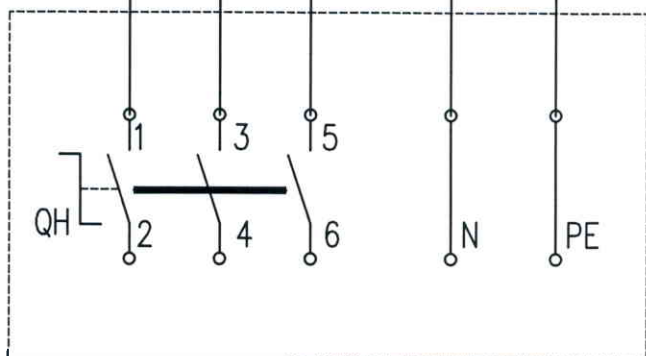

hydraulicky agregat	FH - hl. pojistky	QH - hl. vypinac
motor/ jmen. proud	nebo jistice "C"/"D"	uzamykatelny v poloze 0
0,75kW/1,9A	6A	10A
1,5kW/3,5A	10A	16A
2,2kW/5A	16A	20A
3kW/6,7A	20A	25A
4kW/8,5A	25A	30A
5,5kW/11.5A	35A	40A

Odpovidajici jisteni a privodni kabel overite v tabulce
technickych dat cenove nabidky - nabidkového listu

Nazev:		EL. PRIVOD PRO HYDRAULICKOU PLOŠINU	
Vel: A	File/Cislo vykresu:	PRIVOD	
Datum: prosinec/2014		List:	